


XLED

Highly efficient LED IP65 fitting with white body and LED opal diffuser.

FEATURES

- Over 110 lumens per watt per circuit watt
- All polycarbonate housing
- LED opal diffuser
- Integral sensor option
- 600, 1200, 1500 & 1800 lengths available
- Stainless steel clip option
- Integral emergency options

LED CHARACTERISTICS

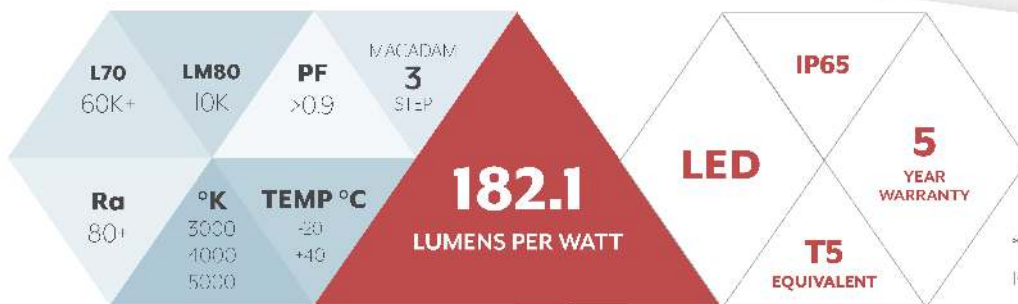

*5% Reduction for 4000K version (suffix -4K);
10% Reduction for 3000K (suffix -3K)


TECHNICAL DETAIL

Part Number	Description	Replaces	Weight (kg)	Circuit Watts (W)	Board Lumens	Luminaire Lumens*	Lf/cW
SGVX10-S-65K	600mm 10W Single Body	1 x 14W T5	1.80	10	1447	1250	123.0
SGVX22-S-65K	1200mm 22W Single Body	2 x 28W T5	2.90	22	3059	2025	117.5
SGVX27-S-65K	1500mm 27W Single Body	1 x 35W T5	3.50	27	3722	2559	120.9
SGVX31-S-65K	1500mm 31W Single Body	1 x 70W T5	4.10	31	4324	3195	135.0
SGVX19-S-65K	600mm 19W Single Body	1 x 24W T5	1.90	19	2608	2217	116.7
SGVX36-S-65K	1200mm 36W Single Body	1 x 57W T5	3.00	36	5157	4566	126.3
SGVX40-S-65K	1500mm 40W Single Body	1 x 80W T5	3.30	40	5604	4763	119.1
SGVX47-S-65K	1800mm 47W Single Body	1 x 70W T5	3.20	47	6558	5537	119.2
SGVX20-T-65K	600mm 20W Twin Body	2 x 14W T5	2.10	20	2891	2160	126.0
SGVX46-T-65K	1200mm 46W Twin Body	2 x 28W T5	3.60	46	7062	5977	129.9
SGVX45-T-65K	1500mm 45W Twin Body	2 x 35W T5	4.20	45	7216	6154	136.3
SGVX68-T-65K	1800mm 68W Twin Body	2 x 70W T5	4.80	68	10576	8966	131.9
SGVX36-T-65K	600mm 36W Twin Body	2 x 24W T5	2.10	36	5085	4322	120.1
SGVX66-T-65K	1200mm 66W Twin Body	2 x 54W T5	3.60	66	9776	8310	125.9
SGVX67-T-65K	1500mm 67W Twin Body	2 x 80W T5	4.80	67	9380	8398	125.3
SGVX95-T-65K	1800mm 95W Twin Body	2 x 70W T5	4.85	95	13010	11909	125.2

OPTIONS AND ACCESSORIES

EM	Integral Emergency (1 Watt)
EMST	Integral Emergency Self Test (1 Watt)
DD	Switch DIM/DAJ
CF	Control Function
CS	Control Function Slave
WL	Wireless Control System (see also)
PIRS	Short Range PIR for Wireless System
SS	Stainless Steel Clips

DIMENSIONS

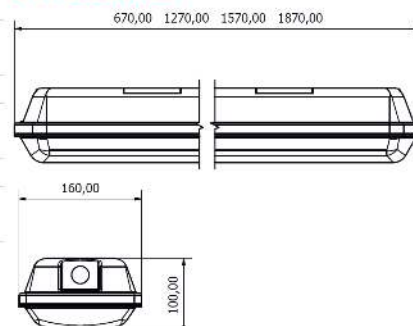

PHOTOMETRIC

